

Ordering method

Model	Acceleration/deceleration specifications	Lead	Shape	Motor specification	Side cover	Stroke	Cable length	Cable entry location	Robot positioner	Driver Power capacity	Regenerative unit	I/O	Battery
AGXS05L	No entry: Standard H: High agility	20: 20 mm 10: 10 mm 5: 5 mm	S: Straight R: Right bending L: Left bending	S: Standard/With no brake BK: Standard/With brake BL: Battery-less absolute/With no brake BKBL: Battery-less absolute/With brake	No entry: Standard W: With T-groove (both sides) R: With T-groove (right side) L: With T-groove (left side)	50 to 800 (50mm pitch)	R3: 3 m R5: 5 m R10: 10 m	R: From rear of motor F: From front of motor	EP-01	A10: 200W or less	No entry: None R: With EP-RU	EP: EtherNet/IP™ PT: PROFINET ES: EtherCAT NS: NPN CC: CC-Link	B: With battery N: None

Note 1. When the shape is bending (R, L), the high acceleration/deceleration specifications cannot be selected.

Note 2. For the high acceleration/deceleration specifications, the stroke is 50 to 550 mm (50 mm pitch).

Note 3. The robot cable is flexible and resists bending.

Note 4. When the actuator is used vertically and the stroke is 500 mm or more, the regenerative unit is needed.

Note 5. When the motor specification is the standard (S, BK), whether to use the battery needs to be selected.

Specifications

AC servo motor output	100 W
Repeatability	+/-0.005 mm
Deceleration mechanism	Ground ball screw ϕ 12 (C5 class)
Stroke	50 mm to 800 mm (50 mm pitch)
Maximum speed	1333 mm/sec 666 mm/sec 333 mm/sec
Ball screw lead	20 mm 10 mm 5 mm
Maximum payload	Horizontal: 12 kg Vertical: 3 kg
Rated thrust	84 N 169 N 339 N
Maximum dimensions of cross section of main unit	W 48 mm x H 65 mm
Overall length	Straight: ST + 236 mm Bending: ST + 191.5 mm
Degree of cleanliness	ISO CLASS 3 (ISO14644-1) or equivalent
Intake air	30 N ℓ /min to 100 N ℓ /min
Position detector	Absolute encoder Battery-less absolute encoder
Resolution	23 bits
Using ambient temperature and humidity	0 to 40 °C, 35 to 80 %RH (non-condensing)

Note 1. Positioning repeatability in one direction.


Note 2. When a moving distance is short and depending on an operation condition, it may not reach the maximum speed. If the effective stroke exceeds 600 mm, the ball screw may resonate. (Critical speed)
At this time, make the adjustment to decrease the speed while referring to the maximum speed shown in the table.

Note 3. When using in a clean environment, attach a suction air joint. The degree of cleanliness is the cleanliness level achieved when using at 1000 mm/sec or less.

Note 4. The required suction amount will vary according to the operating conditions and operating environment.

Note. See P.117 for acceleration/deceleration.

Allowable overhang



AGXS05L-20


Horizontal installation	Unit: mm	A	B	C
3kg	1755	559	426	
8kg	737	200	153	
12kg	608	133	104	

AGXS05L-10

Horizontal installation	Unit: mm	A	B	C
6kg	2416	389	333	
12kg	1397	187	161	
24kg	875	87	74	

AGXS05L-5

Horizontal installation	Unit: mm	A	B	C
10kg	3127	254	225	
20kg	1841	120	106	
32kg	1554	70	62	



Wall installation

Unit: mm	A	B	C
3kg	396	486	1594
8kg	106	128	525
12kg	52	61	329

Wall installation

Unit: mm	A	B	C
6kg	277	316	2192
12kg	101	115	1084
24kg	12	14	276

Wall installation

Unit: mm	A	B	C
10kg	162	181	2800
20kg	42	47	1273
32kg	0	0	0

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 600 mm stroke models.

Static loading moment

MY	MP	MR
72	72	64

Controller



Controller	Operation method
EP-01	I/O point trace/ Remote command

When used with high acceleration or deceleration (High agility mode)

Specifications

Stroke	50 mm to 550 mm (50 mm pitch)
Ball screw lead	20 mm 10 mm 5 mm
Maximum payload	Horizontal: 5 kg Vertical: 1 kg
Maximum acceleration	Horizontal: 14.72 m/s ² (1.5 G) Vertical: 14.72 m/s ² (1.5 G)
Maximum acceleration	Horizontal: 14.72 m/s ² (1.5 G) Vertical: 12.68 m/s ² (1.3 G)
Maximum acceleration	Horizontal: 14.72 m/s ² (1.5 G) Vertical: 6.65 m/s ² (0.7 G)

Payload - Acceleration / Deceleration Graph (Estimate)

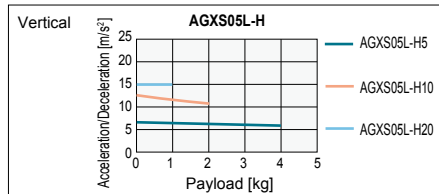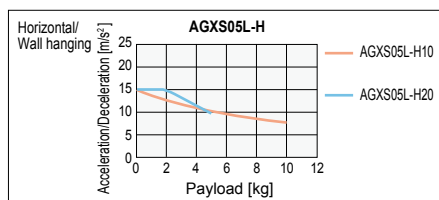

Allowable overhang

Horizontal installation	Unit: mm	A	B	C
2kg	675	501	332	
5kg	330	191	131	

AGXS05L-H10

Horizontal installation	Unit: mm	A	B	C
3kg	1208	469	385	
6kg	665	227	188	
10kg	441	130	108	

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 550 mm stroke models.

Wall installation	Unit: mm	A	B	C
2kg	294	428	626	
5kg	87	118	251	

Wall installation

Unit: mm	A	B	C
3kg	331	396	1144
6kg	131	155	580
10kg	49	58	315

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 550 mm stroke models.

AGXS05L-H5

Vertical installation	Unit: mm	A	C
1kg	1555	1555	
2kg	762	762	
4kg	365	365	

Vertical installation

Unit: mm	A	C
1kg	1298	1298
2kg	636	636

Effective stroke and maximum speed during high acceleration or deceleration

Effective stroke	50	100	150	200	250	300	350	400	450	500	550
Maximum speed (mm/sec)	Lead 20										
	Lead 10										
	Lead 5										

Note. The bending unit cannot be used for the high agility mode.

Note. The high agility mode is used in an effective stroke range of 50 to 550 (50 mm pitch).

Note. There is no critical speed setting. The maximum speed can be set for a selectable stroke.

The speed may not reach the maximum speed if the movement distance is short or depending on the operating conditions.

Note. When the actuator is used with the high acceleration/deceleration specifications, the operation duty and motor load factor need to be considered. (See P.93.)


Note. See P.118 for acceleration/deceleration.

Access the website below.




► The cycle time simulation and service life calculation can be performed easily from our member site. For details, see P.12.


AGXS05L Straight type (S)

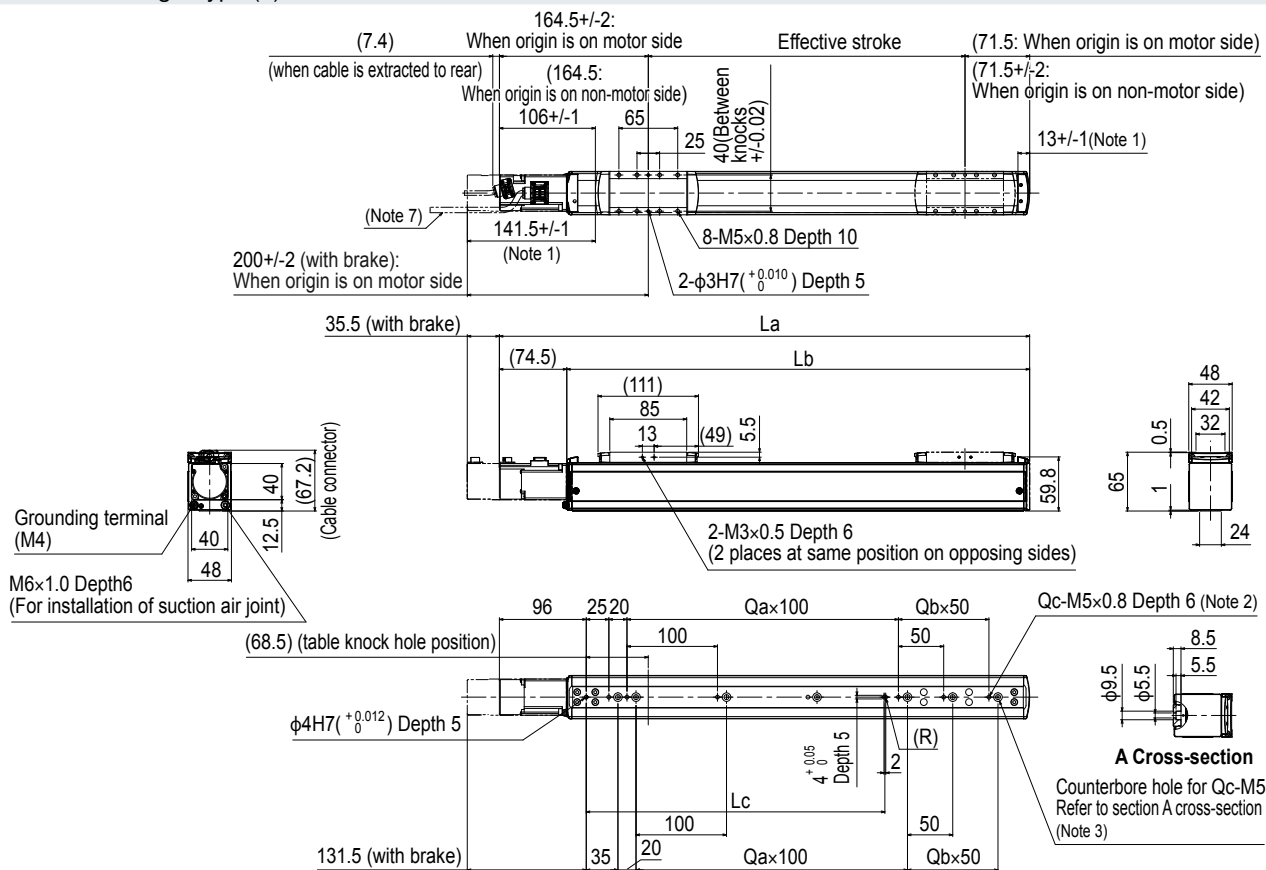


Direction of robot cable extraction

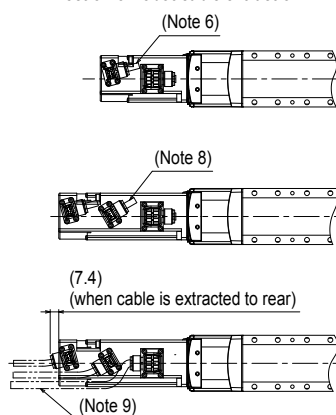


Side cover variations



Battery-less absolute axis specification

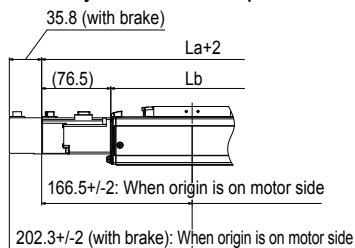

Side cover with T-groove installation reference drawing

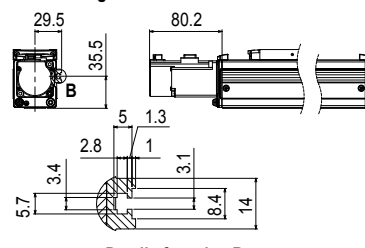

Detail of section B

- Note 1. Stop positions are determined by the mechanical stoppers at both ends.
 Note 2. When changing the return-to-origin direction, the parameter needs to be changed. (The standard is that the origin is located on the motor side.)
 Note 3. When using the tap holes to mount the body, remove the set screws first.
 Note 4. When using the counterbore holes (section A cross section) to mount the body, remove the cap from the inner side and then fix. The length under head of the hex socket head bolts (M5 × 0.8) used must be 15 mm or less.
 Note 5. Weight without brake. The weight with the brake is 0.2 kg heavier than the value in the weight column.
 Note 6. The robot cable is extracted from the front.
 Note 7. The robot cable is extracted from the rear.

- Note 8. The robot cable (with brake) is extracted from the front.
 Note 9. The robot cable (with brake) is extracted from the rear.
 Note 10. The fixed minimum bending radius of the robot cable is R30.
 When using the robot cable as a flexible cable, use it with a minimum bending radius of R50 or more.
 Note 11. Side cover with T-groove is used to install the sensor.
 Note 12. Grease gun nozzle (recommended) (see P.143 for detail)

Effective stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
La	286	336	386	436	486	536	586	636	686	736	786	836	886	936	986	1036
Lb	211.5	261.5	311.5	361.5	411.5	461.5	511.5	561.5	611.5	661.5	711.5	761.5	811.5	861.5	911.5	961.5
Lc	130	130	130	130	330	330	330	330	330	330	630	630	630	630	630	630
Qa	1	1	1	1	3	3	3	3	3	3	6	6	6	6	6	6
Qb	0	1	2	3	0	1	2	3	4	5	0	1	2	3	4	5
Qc	3	4	5	6	5	6	7	8	9	10	8	9	10	11	12	13
Weight (kg) Note 5	1.8	1.9	2.1	2.2	2.4	2.6	2.7	2.9	3.0	3.2	3.3	3.5	3.6	3.8	3.9	4.1
Maximum speed (mm/sec)																
Lead 20																
Lead 10																
Lead 5																
Speed setting																

