

YK180XG

Standard type: Extra small type



- Arm length 180mm
- Maximum payload 1kg

Ordering method

YK180XG - 50

Z axis stroke	Cable
50: 50mm	2L: 2m
	3L: 3.5m
	5L: 5m
	10L: 10m

RCX340-4

Controller /
Number of controllable axes

Safety
standard

Option A
(OP.A)

Option B
(OP.B)

Option C
(OP.C)

Option D
(OP.D)

Option E
(OP.E)

Absolute
battery

Specify various controller setting items. RCX340 ▶ **P.678**

Specifications

		X-axis	Y-axis	Z-axis	R-axis
Axis specifications	Arm length	105 mm	75 mm	50 mm	-
	Rotation angle	+/-125 °	+/-145 °	-	+/-360 °
AC servo motor output		30 W	30 W	30 W	30 W
Deceleration mechanism	Transmission method	Direct-coupled			
	Motor to speed reducer Speed reducer to output	Direct-coupled			
Repeatability ^{Note 1}		+/-0.01 mm	+/-0.01 mm	+/-0.004 °	
Maximum speed		3.3 m/sec	0.9 m/sec	1700 °/sec	
Maximum payload		1.0 kg			
Standard cycle time: with 0.1kg payload ^{Note 2}		0.33 sec			
R-axis tolerable moment of inertia ^{Note 3}		0.01 kgm ²			
User wiring		0.1 sq × 8 wires			
User tubing (Outer diameter)		φ 4 × 2			
Travel limit		1.Soft limit 2.Mechanical stopper (X,Y,Z axis)			
Robot cable length		Standard: 2 m Option: 3.5 m, 5 m, 10 m			
Weight (Excluding robot cable) ^{Note 4}		4.1 kg			
Robot cable weight		0.9 kg (2 m)	1.5 kg (3.5 m)	2.1 kg (5 m)	4.2 kg (10 m)

Note 1. This is the value at a constant ambient temperature. (X,Y axes)

Note 2. When moving 25mm in vertical direction and 100mm in horizontal direction reciprocally.

Note 3. The acceleration coefficient is set automatically in accordance with the tip weight and R-axis moment of inertia settings.

Note 4. The total robot weight is the sum of the robot body weight and the cable weight.

Controller


Controller	Power capacity (VA)	Operation method
RCX340	500	Programming / I/O point trace / Remote command / Operation using RS-232C communication

Note. The movement range can be limited by changing the positions of X and Y axis mechanical stoppers. (The movement range is set to the maximum at the time of shipment.)
See our robot manuals (installation manuals) for detailed information.

Our robot manuals (installation manuals) can be downloaded from our website at the address below:
<https://global.yamaha-motor.com/business/robot/>



YK180XG

Connector for user wiring
(No. 1 to 8 usable, socket contact)
J.S.T. Mfg Co., Ltd. SM connector
SMR-8V-B, pin SYM-001T-P0.6
(supplied)
Use the YC12 crimping tool.

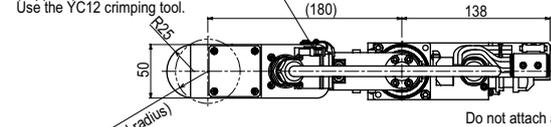

Do not attach any wire or tube to self-supporting cable.
Doing so may degrade positioning accuracy.


If attaching wire or tube, make use of these air tubes.
For details, refer to "10 When attaching a new user wire or tube" in Chapter 3.

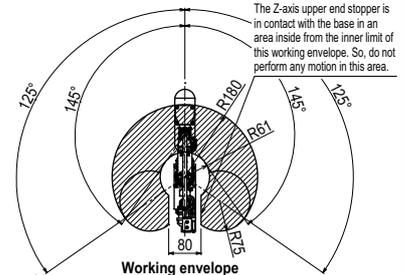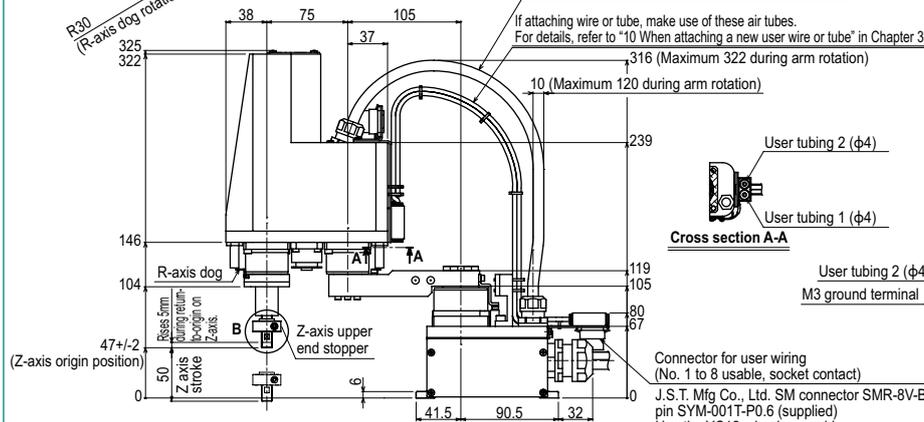

Working envelope

X, Y-axis origin is at +/-5° with respect to front of robot base

When performing return-to-origin, move the axes counterclockwise in advance from the position shown above.



Cross section A-A

